
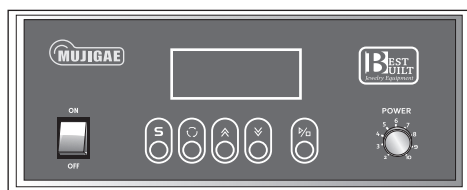


## Separate Type Cleaner

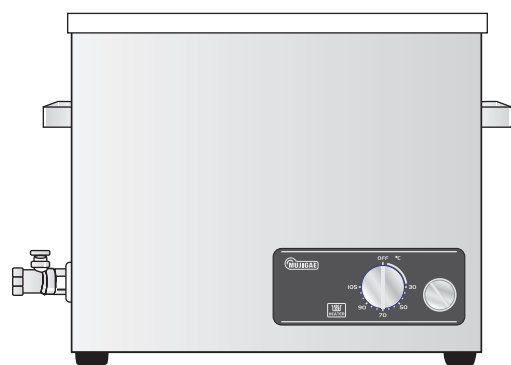

### Digital Display

Ultrasonic Operation time, Ultrasonic Output, Ultrasonic Frequency

### Ultrasonic Output

Easy simple output by turning up/down the volume (5~100%)

### Long time Operation

Work long time (1sec.~10hr.)

### Sweep Function / Automatic Operation function

Built in the Automatic Operation mode to perform effectively according to any changes of water level and also added Sweep mode to clean more accurate operations.

### Temperature & Drain function

Built in a Drain valve to drain the liquid easy and control the Temperature range from 30 to 105c.

## Specification

Spec. Model	Frequency	Inside diameter (WxLxH)	Outside diameter (WxLxH)	Capacity	Control output
SDN-600H	40KHz	400x300x250	480x380x400	30L	600W
SDN-900H	40KHz	450x350x300	530x430x450	47L	900W
SDN-1200H	40KHz	500x400x300	580x480x450	60L	1200W
SDN-1500H	40KHz	550x450x300	630x530x450	74L	1500W
Range	Power	Materials	Heater	Spare parts	
Continuous operation (0~99min.)	220V	tank [SUS-304] osillator [Steel coating]	1KW	cover(sus-304), manual, power-code, foot s/w, remote-jack, hose x 1m, hose-band, hose-nipple	

## Cleaning Liquid (for options)

Required for better cleaning performance

Model	11UN	16PLUS	1169
Component	Alkali	Neutrality	Alkali
Target	glass, quartz, ceramic ware, crystal compound, rubber, iron, metal	aluminum, zinc, tin, borosilicate, glass, quartz glass, stainless, chrome, nickel, polyethylene polypropylene, Teflon, silicon rubber, rubber	nonferrous metal, stainless, chrome steel, iron steel, precious metal, titanium, nickel
Solution rate	3/100%	3/100%	3/100%

## SD-ULTRASONIC CO.,LTD

No.560, Sewoon B/D, #173 Jangsa-dong, Jongro-ku, Seoul, Korea  
Tel] +82-1644-5897 Fax] +82-2-2278-2276  
<http://www.sd-ultra.com>