


SD-D250H



FEATURE

- Digital Indicator**
Display setting/current temperature & Ultrasonic operation time/output
- Strong Durability**
Waterproof by silicon, Strong stainless body
- Strong Cleaning Performance**
Built in powerful BLT vibrator
- Ultrasonic Output controls** : Output controls(20~100%), timer (max. 60min.)
- Display Temperature** : Current/Setting value(30~80c) display
- SWEEP**
Generate 2 different sequential frequencies to clean more widely/efficiently during ultrasonic operation.

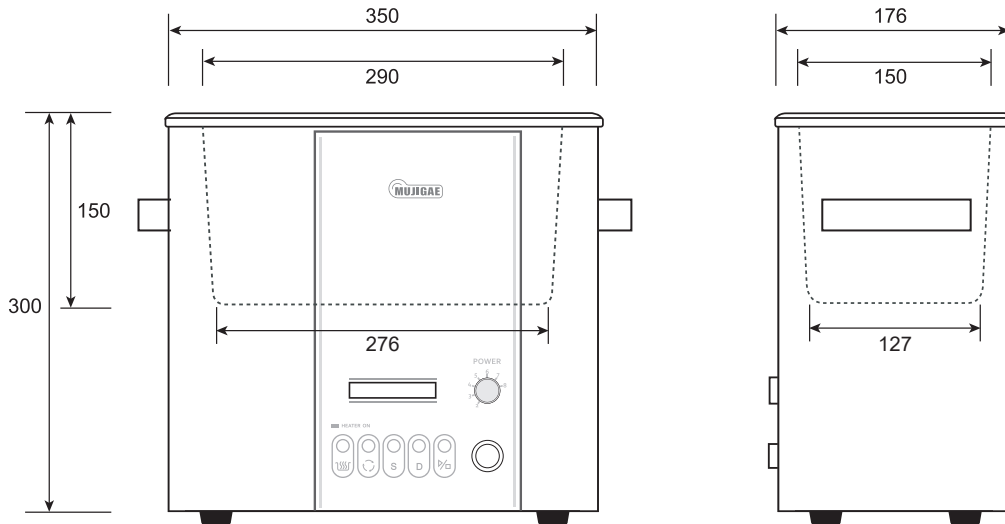

SPECIFICATIONS

Model	SD-D250H
Inside Diameter	290(W) x 150(L) x 150(H)
Outside Diameter	350(W) x 176(L) x 300(H)
Capacity	6L
Ultrasonic Frequency	40kHz
Ultrasonic Output	150W
Power Consumption	390W
Gross Weight	6kg(Net Weight) / 7.2kg(Gross Weight)
Power	AC220V / 60Hz
Heat Capacity	170W
Operation Time	Operation time : 0~60min. Thermostat : 30~85°C +- 10%
Materials	Tub: SUS-304, Body: SUS-430
Spare parts	Cover, Fuse x 2, Manual
Accessory	BT-250