


SD-D300H



FEATURE

- **Digital Indicator** : Display setting/current temperature & Ultrasonic operation time/output
- **Strong Durability** : Waterproof by silicon, Strong stainless body
- **Strong Cleaning Performance** : Built in powerful BLT vibrator
- **Ultrasonic Output controls** : Output controls(20~100%), timer (max. 60min.)
- **Display Temperature** : Current/Setting value(30~80c) display
- **SWEEP** : Generate 2 different sequential frequencies to clean more widely/efficiently during ultrasonic operation.
- **DEGAS** : The "Degas function" speed up the escaping of the gas containing in the tub.

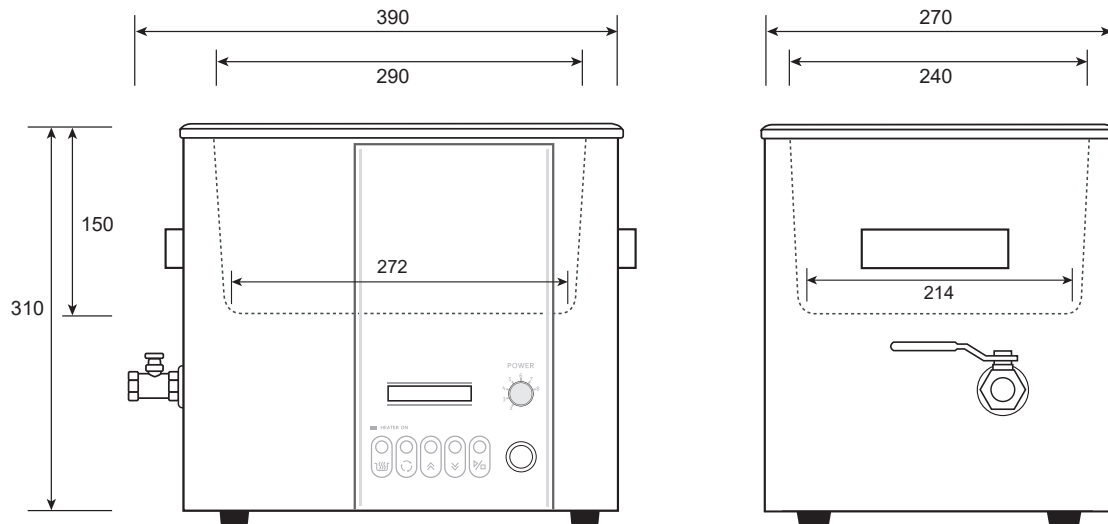

SPECIFICATIONS

Model	SD-D300H
Inside Diameter	290(W) x 240(L) x 150(H)
Outside Diameter	390(W) x 270(L) x 310(H)
Capacity	10L
Ultrasonic Frequency	40kHz
Ultrasonic Output	250W
Power Consumption	610W
Gross Weight	9kg(Net Weight) / 10.5kg(Gross Weight)
Power	AC220V / 60Hz
Operation Time	Operation time : 0~60min. Thermostat : 30~85°C +- 10%
Materials	Tub: SUS-304, Body: SUS-430
Spare parts	Cover, Fuse x 2, Manual, BT-300
Accessory	BT-300